



GARY SHAW ARCHITECTS


design + planning

1821 margaret st. austin, texas 78704
off: (512)416-8471
fax: (512)416-8478



KENEDY RETAIL


131 BUSINESS PARK DRIVE
KENEDY, TEXAS 78119

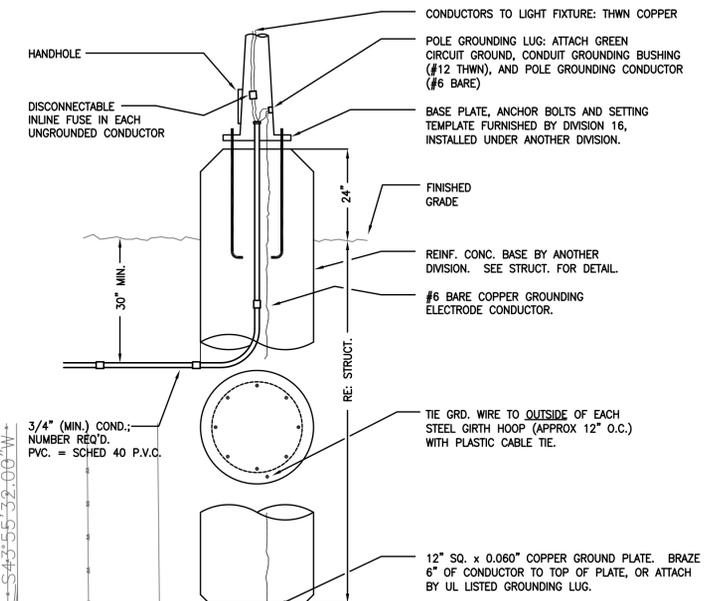

2 LIGHT POLE FOOTING - ELEC.
NTS

SITE PLAN KEYED NOTES

- 1 ELECTRICAL SERVICE ENTRANCE LOCATION. REFER TO ELECTRICAL RISER DIAGRAM ON DRAWING 2/E3.0.
- 2 TELEPHONE & CATV SERVICE ENTRANCE. REFER TO DETAIL ON DRAWING 1/E1.0.
- 3 ROUTE 1- 4" E.C. FOR TELEPHONE SERVICE AND 1- 2" FOR CATV SERVICE. TERMINATE AS DIRECTED BY THE SERVING UTILITIES.
- 4 REFER TO POLE BASE DETAIL ON DWG. 2/EU1.0
- 5 CONTRACTOR SHALL COORDINATE WITH LOCAL ELECTRIC COMPANY FOR CONNECTION & LOCATION OF POLE MOUNTED TRANSFORMERS.
- 6 PROVIDE 24" X 24" NON-TRAFFIC RATED PULLBOX PER LOCAL ELECTRIC COMPANY REQUIREMENTS.
- 7 ELECTRICAL CONNECTION TO SITE SIGNAGE, 120 VOLT, 1-PHASE. VERIFY EXACT LOCATION WITH OWNER PRIOR TO ROUGH-IN.
- 8 NEW ELECTRICAL UTILITY POLE WITH POLE MOUNTED TRANSFORMERS.

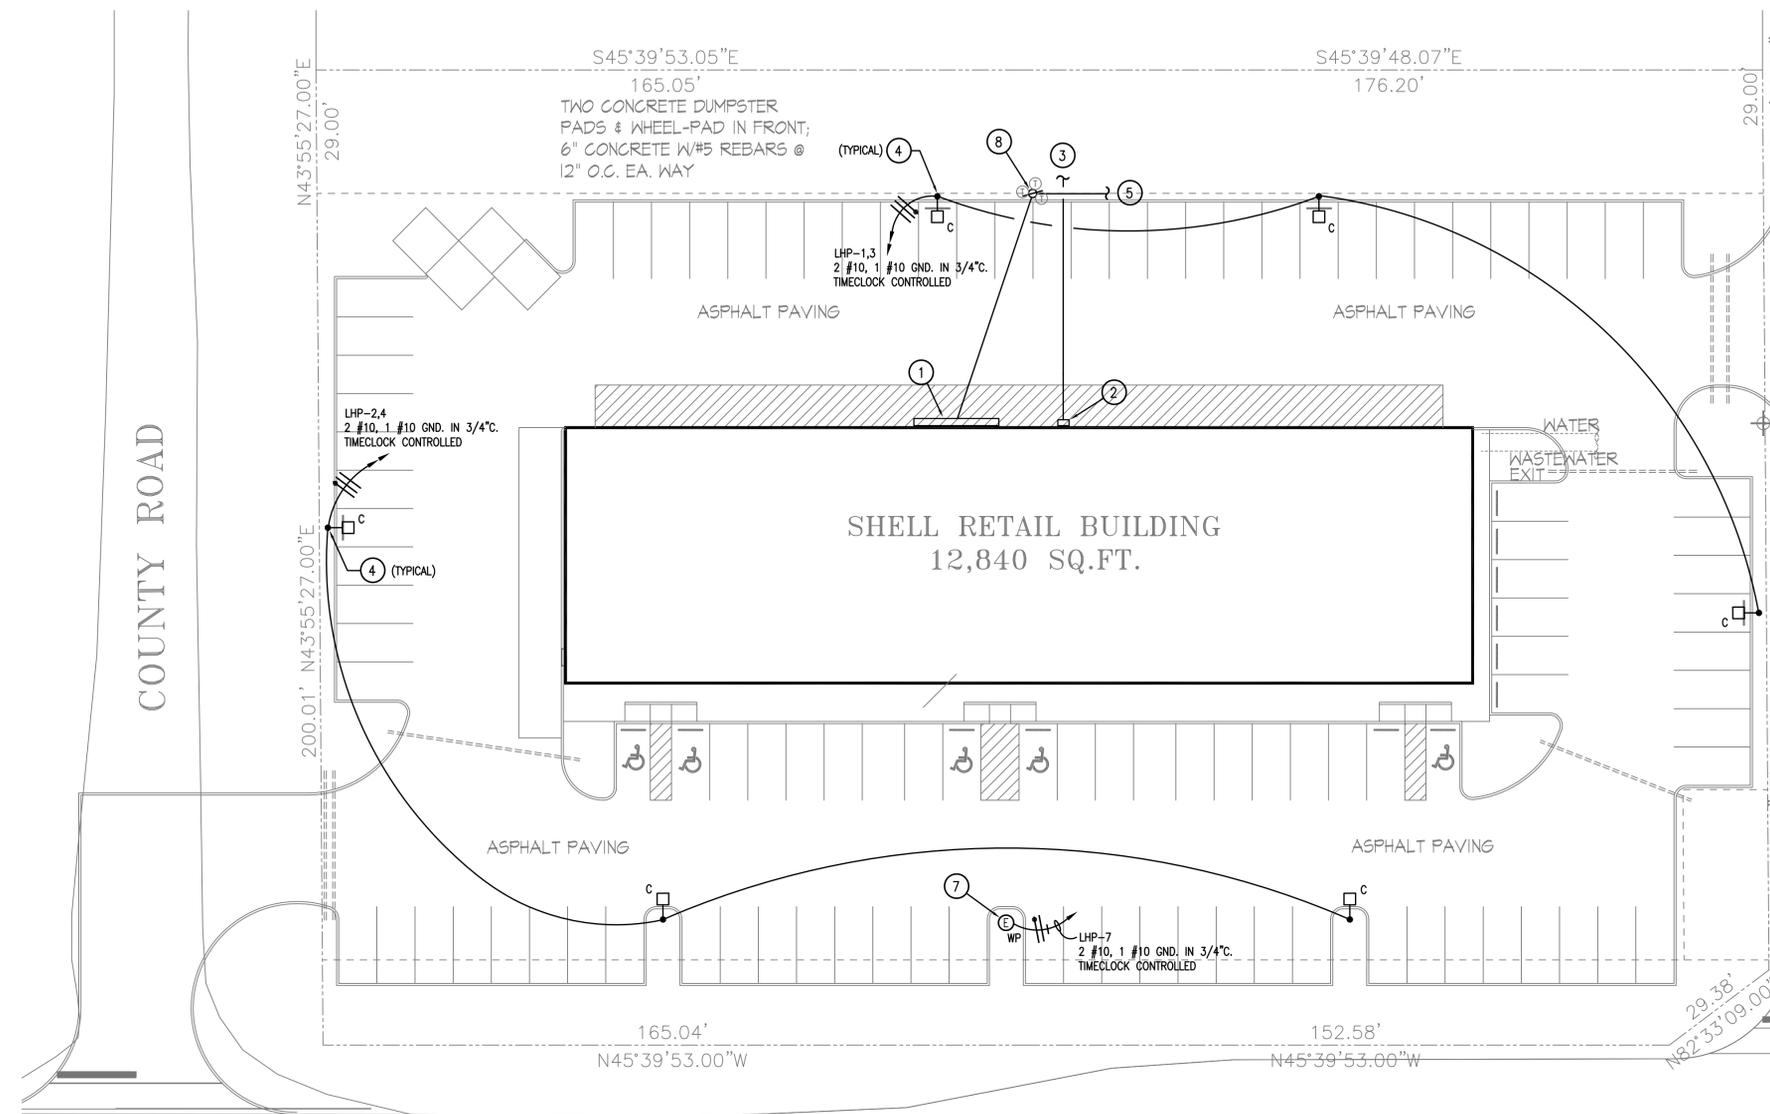

S. HIGHWAY 181

1 SITE PLAN - ELECTRICAL
SCALE: 1" = 20'-0"

AYS



Engineering, LLC
M/E CONSULTING ENGINEERING
203 E. Main Street, Suite 204 - Round Rock - TX 78664
www.AYSEng.com - 512-961-6835
TDPE Form E-10298

SITE PLAN - ELECTRICAL
sheet no.

EU1.0